


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	2.0 A			
RATED VOLTAGE [V]	125 VAC/VDC			
OUTER JACKET MATERIAL/COLOR	TPU/BLACK			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	6x26 AWG			
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			
·	·			

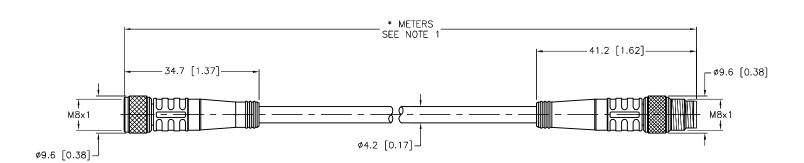

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

## NOTES:

- 1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S90" DESIGNATES POLYURETHANE (TPU) CABLE.

					[
G	UPDATE MALE COUPLING NUT	RDS	05/09/13	40191	
REV	DESCRIPTION	BY	DATE	ECO NO.	

## SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL		DRFT RWC	DATE 10/08/07	DESCRIPTION PKG 6M-*-PSG	- 6M/SOO	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	FNG OM-1-F3G	5 ON/ 390	
L		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
	FINISH	CONTACT TURCK	MILLIMETE	ER [INCH]			$\sim$
]	SEE SPECIFICATIONS	FOR MORE INFORMATION					G
			DO NOT SCALE	THIS DRAWING	FILE: 777008289	SHEET	1 OF 1