


SPECIFICATIONS							
TPU/YELLOW							
TPU/YELLOW							
BRASS/GOLD							
BRASS/NICKEL							
10.0 A							
600 V							
PVC/YELLOW							
PVC							
3x16 AWG							
-40°C to +105°C (-40°F to +221°F)							
MEETS NEMA 1,3,4,6P AND IEC IP67							

SOURCE DRAWING - FOR REFERENCE ONLY

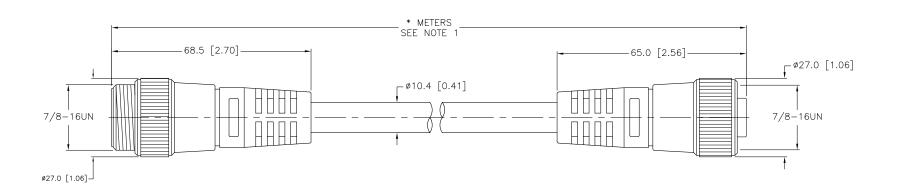

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

CBM 04/06/11

DATE

NOTES:

REV DESCRIPTION

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

DRAWING PROCESSED AS PART OF ECO 33971

RELATED DOCUMENTS 1. 2. 3. 4.		1. 2. 3.	3RD ANGLE PROJECTION	PROF TURCK THIS WITHOU PERM	DRAWING IS PERTY OF INC. USE OF DOCUMENT UT WRITTEN MISSION IS DHIBITED.	TURCK NAC			MINNEAPO 1-800 (763) (763)	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		MATERIAL		DRFT	JBJ	DATE 5/26/98	DESCRIPTION			31 CK.COIII	
					JBJ	5/26/96		DCM D	KM 36-*N	1	
		SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN		SCALE 1=1.3		K2M K	KIVI 30-1	VI	
EINIISH			DRAWING ARE FOR	UNIT OF MEASUREMENT							
		FINISH	REFERENCE ONLY				IDENTIFICATION	NO.			REV
TINISIT			CONTACT TURCK FOR MORE	MILLIMETER [INCH]							
1	33971	SEE SPECIFICATIONS	INFORMATION								
1	ECO NO.	022 01 2011 107 1110110		DC	NOT SCALE	THIS DRAWING	FILE: 777000	789		SHEET	1 OF 1