


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GREY			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	3x20 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K			

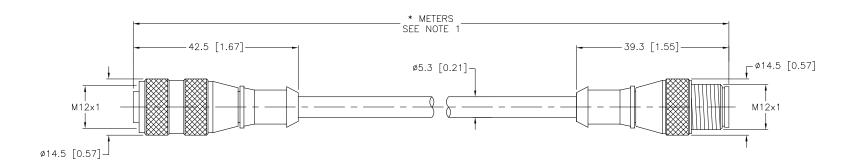

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

Н	UPDATE CABLE DIAMETER	KMY	12/27/11	37144
REV	DESCRIPTION	BY	DATE	ECO NO.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	RCK Inc Sensors and Automation Controls	3000 CAMPUS DRIVE MINNEAPOLIS, MN 5544 1-800-544-7769 (763) 553-7300 (763) 553-0708 f turck.com	41
MATERIAL		DRFT JBJ	DATE 07/20/00	DESCRIPTION RK 4T-*-	DC 4T	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	KN 41-1-	-RS 41	
022 01 201 107 110	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.	I RE	57
FINISH	CONTACT TURCK	MILLIMETER [ INCH ]		IDENTIFICATION NO.	I NE	<u>'</u>
SEE SPECIFICATIONS	FOR MORE INFORMATION	MICHAELERICITI				
		DO NOT SCALE	THIS DRAWING	FILE: 777000636	SHEET 1 0	F 1