


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	7.0 A				
RATED VOLTAGE [V]	600 V				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
NUMBER OF CONDUCTORS	12x16 AWG				
CONDUCTOR INSULATION MATERIAL	PVC				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68				

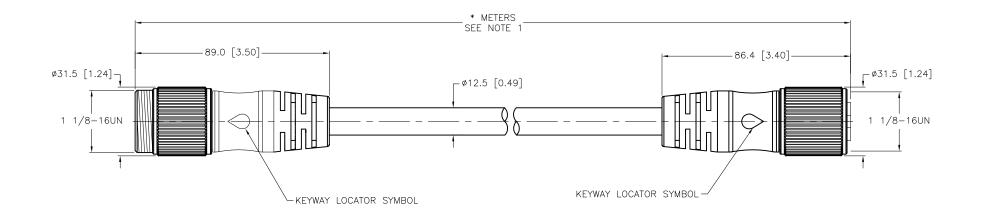

CABLE LENGTH	TOLERANCE			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH TOLERANCE				
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

G	UPDATE CABLE DIAMETER	KMY	03/12/12	37298
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	MINNEAP 1-80 Controls (763 (763	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
	ALL DIMENSIONS DISPLAYED ON THIS	DRFT JBJ APVD	DATE 05/15/03 SCALE 1=1.8	DESCRIPTION RSM	RKM 126-*	^s M	
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.			REV
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]					G
]		DO NOT SCALE THIS DRAWING FILE: 777002326				SHEET	1 OF 1